


## SE50 UNIVERSAL SILENCER

### Options:

- BS10 Table 'D' flanges fitted as standard
- Alternative flange patterns available on request
- B.S.P. connections available on smaller sizes
- Radial / axial inlet
- Radial / axial outlet
- Heat resisting aluminium or black paint
- Shot blast and aluminium metal sprayed
- Stainless steels
- Support feet and brackets
- Lifting lugs
- Drain plugs
- Catalytic converters

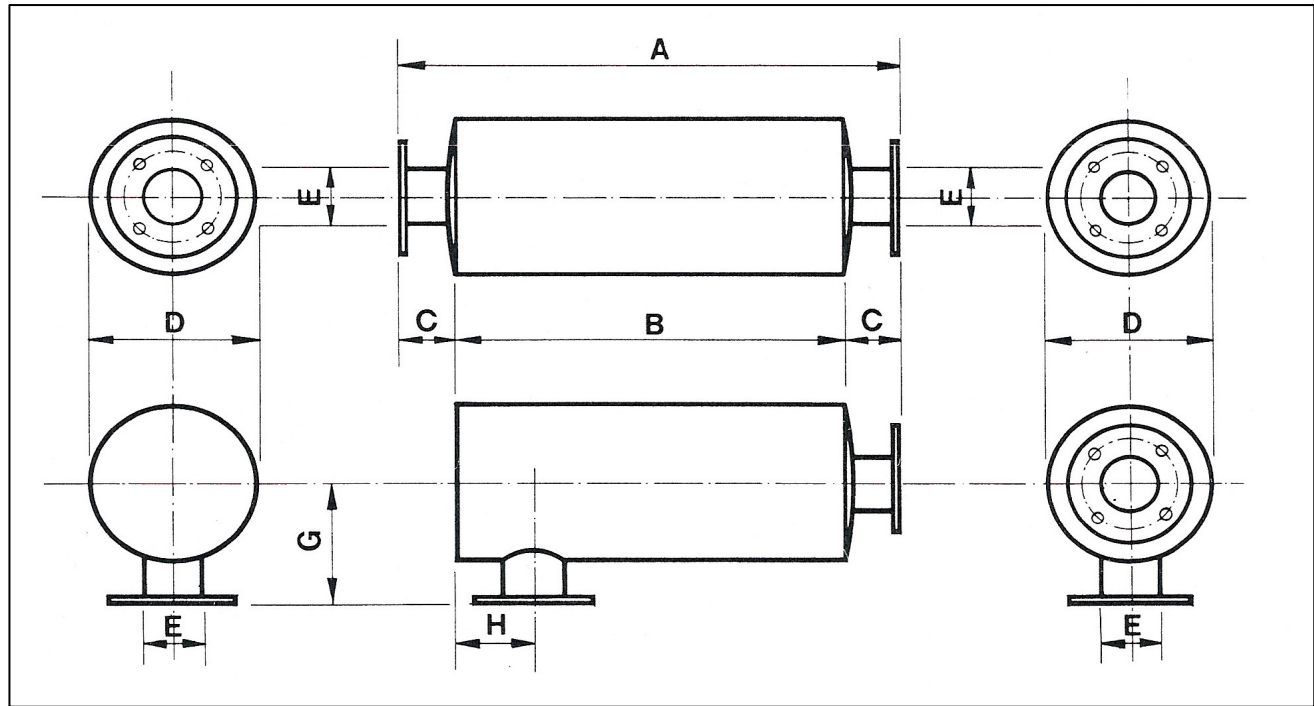

*Note: side and bottom inlets & outlets available on request.*

E Bore			A		B		C		D		E		G		H Min		H Max		EST wt Lbs	EST wt Kgs	Peco Part No
2	S	51	42	1067	35	889	3.25	83	12.5	318	2	51	9.25	235	3	76	14	356	39	18	SE 502 S
2.5	S	64	46	1168	39	991	3.25	83	14.5	368	2.5	64	10.5	267	3.5	89	13.5	343	52	24	SE 502S S
3	S	76	54	1372	47	1194	3.25	83	16.5	419	3	76	11.5	292	4	102	21	533	69	31	SE 503 S
3		76	54	1372	47	1194	3.25	83	16.5	419	3	76	11.5	292	4	102	21	533	78	35	SE 503
4		102	64	1626	57	1448	3.5	89	18.5	470	4	102	12.5	318	5.25	133	24	610	130	59	SE 504
5		127	72	1829	64	1626	3.5	89	22.5	572	5	127	15	381	6.5	165	30.5	775	210	95	SE 505
6		152	85	2159	76	1930	3.75	95	26.5	673	6	152	18	457	7	178	34.5	876	340	154	SE 506
8		203	103	2616	96	2438	4.5	114	31.0	787	8	203	19	483	8	203	38	965	515	234	SE 508
10	*	254	118	2997	111	2819	3.5	89	37	940	10	254	22	559	9.5	241	50	1270	800	363	SE 510
12	*	305	127	3226	120	3048	3.5	89	41	1041	12	305	24	610	10.5	267	58	1473	1260	572	SE 512
14	*	356	148	3759	141	3581	3.5	89	41	1041	14	356	24	610	12	305	62	1575	1600	726	SE 514
16	*	406	164	4166	156	3962	3.5	89	47	1194	16	406	27	686	13	330	74	1880	2450	1112	SE 516
18	*	457	179	4547	171	4343	4	102	52	1321	18	457	30	762	14	356	81	2057	2930	1330	SE 518
20	*	508	194	4928	186	4724	4	102	56	1422	20	508	32	813	15.5	394	89	2261	3850	1748	SE 520