


SLS EXHAUST GAS SILENCER

Options:

- BS10 Table 'D' flanges fitted as standard
- Alternative flange patterns available on request
- B.S.P. connections available on smaller size
- Radial / axial inlets
- Radial / axial outlets
- Heat resisting aluminium or black pair
- Shot blast and aluminium metal spray
- Stainless steels
- Support feet and brackets
- Lifting lugs
- Drain plugs
- Catalytic converters

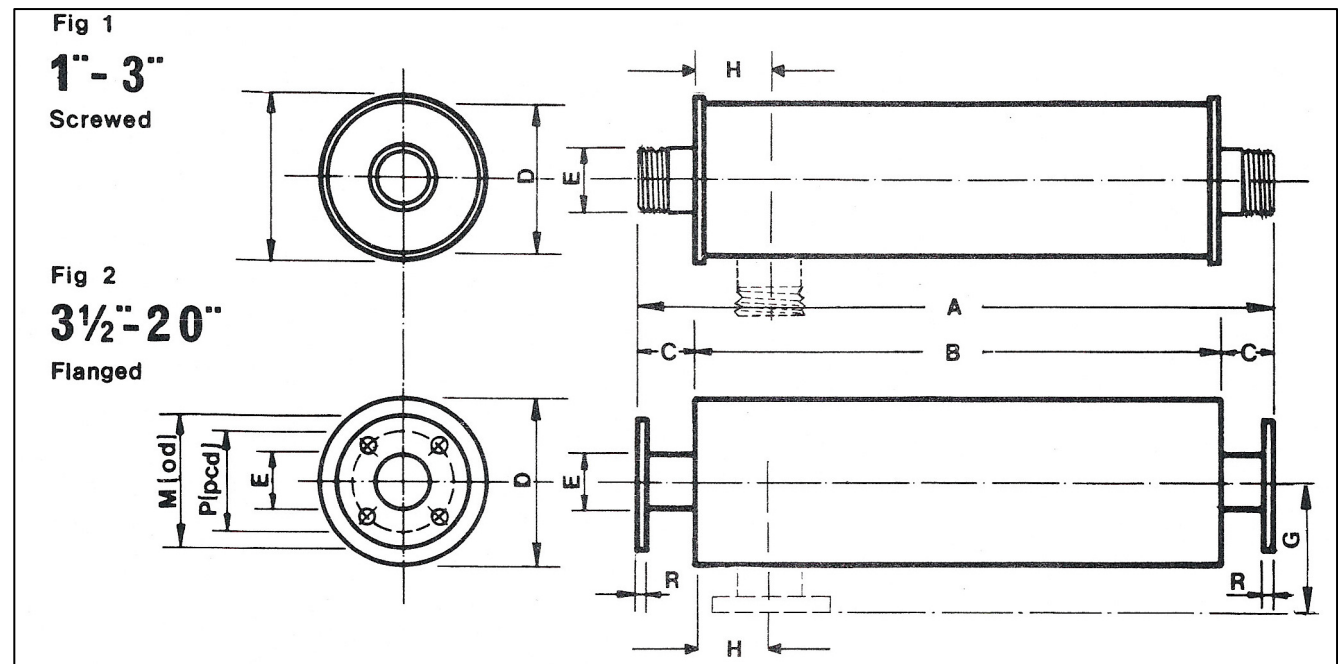

Note: side and bottom inlets & outlets available on request.

E Bore		A		B		C		D		G		H		M		N		P		R		EST wt Lbs	EST wt Kgs	Peco Part No
1	25	17.5	445	15	381	1.25	32	3	76	*	*	*	*	*	*	*	*	*	*	*	*	3	1	SLS101
1.25	32	17.5	445	15	381	1.25	32	3	76	*	*	*	*	*	*	*	*	*	*	*	*	4	2	SLS102
1.5	38	25.5	648	23	584	1.25	32	4	102	5	127	1.25	32	*	*	*	*	*	*	*	*	7	3	SLS103
2	51	31.5	800	29	737	1.25	32	5	127	5.5	140	1.5	38	*	*	*	*	*	*	*	*	11	5	SLS104
2.5	64	31.5	800	29	737	1.25	32	5	127	5.5	140	1.75	44	*	*	*	*	*	*	*	*	12	5	SLS105
3	76	32	813	29	737	1.5	38	6	152	6	152	2	51	*	*	*	*	*	*	*	*	18	8	SLS106
3.5	89	39	991	33	838	3	76	7	178	6.25	159	2.25	57	8	203	4X11/16	17	6.5	165	3/8"	10	33	15	SLS107
4	102	39	991	33	838	3	76	9	229	7.5	191	2.5	64	8.5	216	4X11/16	17	7	178	3/8"	10	44	20	SLS108
5	127	39	991	33	838	3	76	12	305	9	229	3	76	10	254	8X11/16	17	8.25	210	1/2"	13	68	31	SLS110
6	152	51	1295	44.5	1130	3.25	83	14	356	10.25	260	3.5	89	11	279	8X11/16	17	9.25	235	1/2"	13	101	46	SLS112
7	178	51	1295	44.5	1130	3.25	83	14	356	10.25	260	3.5	89	12	305	8X11/16	17	10.25	260	1/2"	13	102	46	SLS114
8	203	62	1575	55	1397	3.5	89	16	406	11.5	292	4.5	114	13.25	337	8X11/16	17	11.5	292	1/2"	13	140	64	SLS116
9	229	62	1575	55	1397	3.5	89	16	406	11.5	292	4.5	114	14.5	368	8X11/16	17	12.75	324	1/2"	13	150	68	SLS118
10	254	74	1880	67	1702	3.5	89	18	457	12.5	318	6	152	16	406	8X11/16	17	14	356	1/2"	13	290	132	SLS120
12	305	98	2489	88.5	2248	4.75	121	22	559	15	381	7	178	18	457	12X7/8	22	16	406	5/8"	16	472	214	SLS124
14	356	98	2489	88.5	2248	4.75	121	22	559	15	381	8	203	20.75	527	12X1	25	18.5	470	5/8"	16	500	227	SLS128
16	406	108	2743	100	2540	4	102	30	762	19	483	9	229	22.75	578	12X1	25	20.5	521	5/8"	16	738	335	SLS132
18	457	108	2743	100	2540	4	102	30	762	19	483	10	254	25.25	641	12X1	25	23	584	5/8"	16	772	350	SLS136
20	508	122	3099	114	2896	4	102	30	762	19	483	11	279	27.75	705	12X1	25	25.25	641	5/8"	16	827	375	SLS140